


BAM292 | GENERAL INFORMATION



1-29/32" O.D. arm mount T5 fixture for remote ballast operation

Project: _____ Type: _____

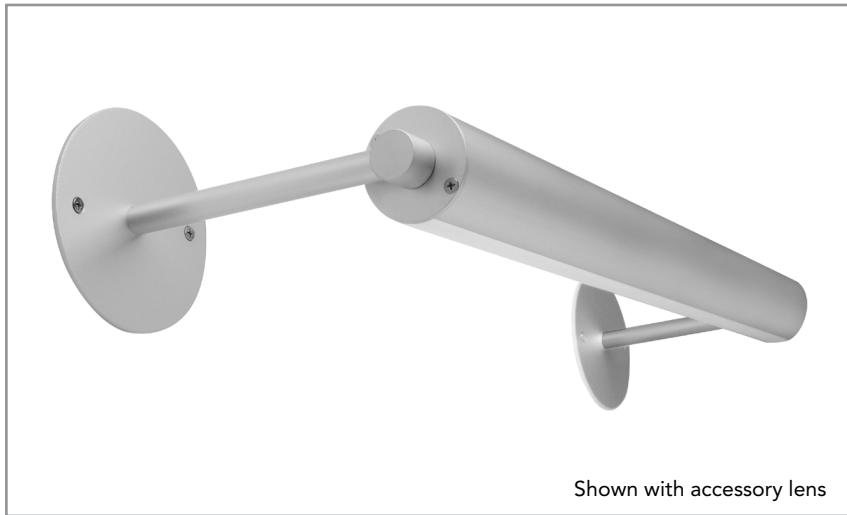

SPECIFICATIONS

- Fixture housing constructed of an extruded aluminum housing, steel lamp liner and sheet aluminum end caps
- Fixture arms are constructed of steel pipe, Ø5/8" extruded aluminum sleeves and machined aluminum end cap couplers
- Aluminum mounting plate options available for attaching fixtures to wall boxes or panels
- Standard finishes as shown below
- Specified arm centers of 24"-60" available as single fixtures or continuous runs
- Arms allow fixture to project from a wall or ceiling nominally 4", 6", 12" or 18"
- Fixture housing rotates 332° and is locked in place with hex fastener
- Available for T5 standard output 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W lamps.
- Includes exclusive LPSS® lever pivot lamp holders, to assist in proper lamp installation
- Requires a remote rapid start type ballast and enclosure (ordered separately, refer to supplemental ballast details sheet for availability)
- Fixture wired with 12', 18 ga. leads for rapid start ballast operation
- Limited one year warranty
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and assembled
- Made in U.S.A.

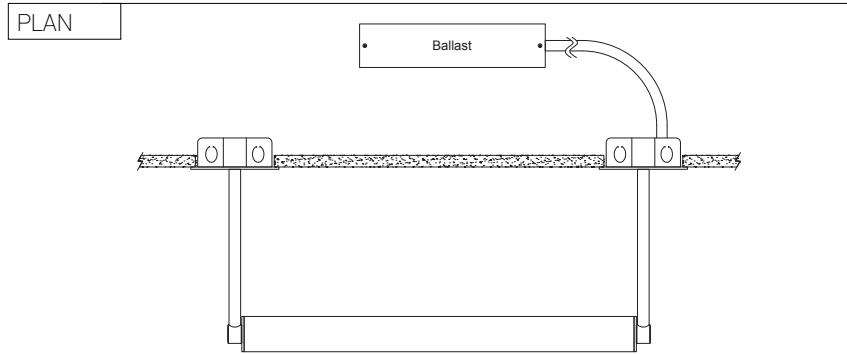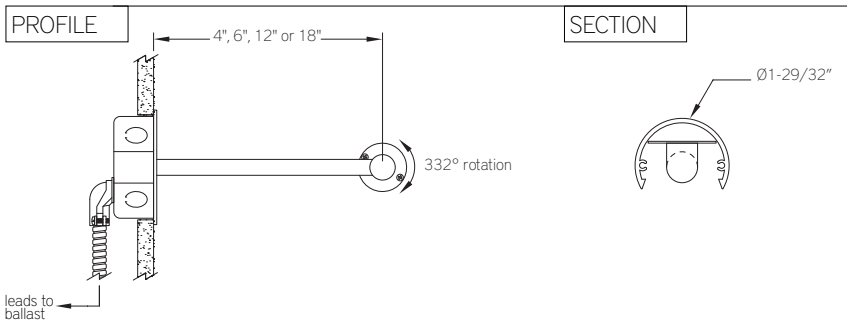

BAM292 +

LAMP	ARM CENTER DISTANCE RANGE**	NOMINAL ARM LENGTH	MOUNTING OPTION	RUN CONFIGURATION	FINISH
14: 14W T5	24" - 35-15/16"	4: 4"	WB: wall box plate	SN: single	AW: architectural white (semi-matte)
21: 21W T5	36" - 47-15/16"	6: 6"	TP: trim plate	ST: starter	WH: white (semi-gloss)
28: 28W T5	48" - 59-15/16"	12: 12"	CF: consult factory for custom mounting	AD: adder	BL: black (semi-matte)
35: 35W T5	60" ONLY	18: 18"		TR: terminator	MB: matte black
24: 24W T5 HO	24" - 35-15/16"	CF: consult factory for custom arm length			ESS: environmental satin silver
39: 39W T5 HO	36" - 47-15/16"				BZ: bronze
54: 54W T5 HO	48" - 59-15/16"				PR: primer
80: 80W T5 HO	60" ONLY				CF: consult factory for custom finish
					SA: satin anodize (may require additional lead time)

Notes: Remote driver ordered separately, refer to supplemental driver details sheet for availability

** NOTE: Specify arm centers within the range for a given lamp. Manufactured length tolerance is ± 1/16"

MOUNTING

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
WB	WALL BOX MOUNTING PLATE	<ul style="list-style-type: none"> • Ø4-3/4" x 1/8" sheet aluminum plate in matching finish for mounting to 4" octagonal junction box (by others) • Includes flat head Phillips machine screws
TP	TRIM PLATE	<ul style="list-style-type: none"> • Ø1-3/8" x 1/8" sheet aluminum plate in matching finish for mounting to a panel with access to the back side. • Includes flat washer, hex nut and fitting for adapting from the threaded arm tube to a conduit connector (by others) • Accommodates panel thickness up to 3/4" (consult factory for special mounting conditions)

ACCESSORIES

	ORDERING CODE	FOR LAMP	DESCRIPTION
	LNS92P-CUT	14W, 21W, 28W, 35W, 24W HO, 39W HO, 54W HO, 80W HO	Linear prismatic acrylic snap-in lens Length calculated by factory for minimal clearance within fixture housing
	LNS920-CUT	14W, 21W, 28W, 35W, 24W HO, 39W HO, 54W HO, 80W HO	White opal acrylic snap-in lens Length calculated by factory for minimal clearance within fixture housing
	TGT52 TGT53 TGT54 TGT55	14W 21W 28W 35W	Clear polycarbonate tube with end caps NOT AVAILABLE FOR HIGH OUTPUT LAMPS