

ARM CENTER DISTANCE

NOTES: Specify arm center distance to the nearest 1/16"
Manufactured length tolerance is ±1/16"

RUN CONFIGURATION INFORMATION


ORDERING CODE	LENGTH MIN.	LENGTH MAX.
14 or 24	24"	35-15/16"
21 or 39	36"	47-15/16"
28 or 54	48"	59-15/16"
35 or 80	60" ONLY	

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Single Fixtures

Plan View

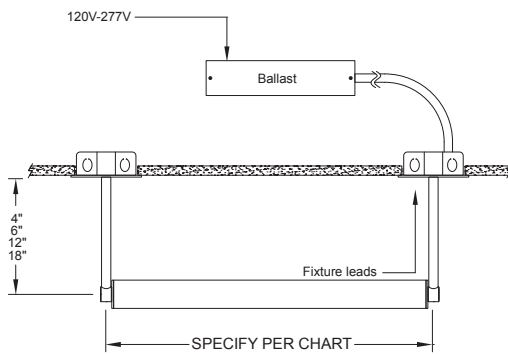


Front View

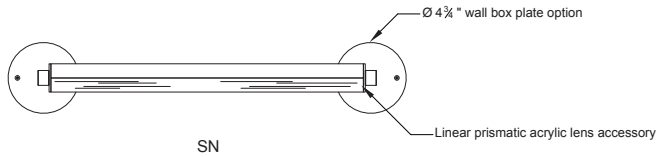

Continuous Runs

Plan View

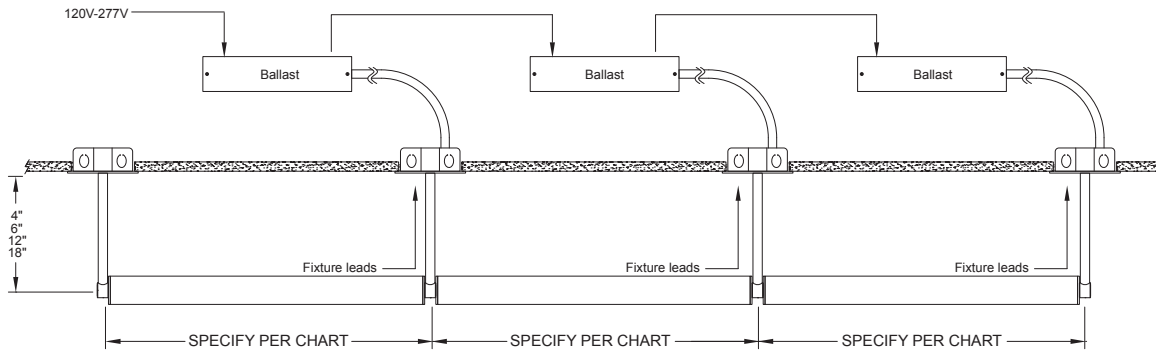

Front View

