

BAM900 | GENERAL INFORMATION

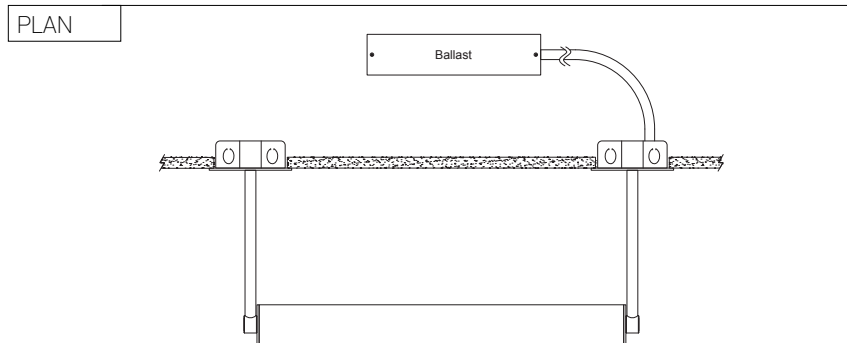
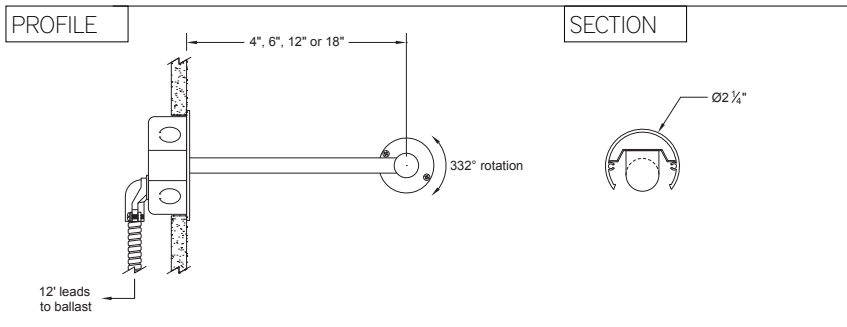
2-1/4" O.D. arm mount T8 fixture for remote ballast operation

Project: _____ Type: _____



SPECIFICATIONS

- Fixture housing constructed of an extruded aluminum housing, steel lamp liner and sheet aluminum end caps
- Fixture arms are constructed of steel pipe, Ø5/8" extruded aluminum sleeves and machined aluminum end cap couplers
- Aluminum mounting plate options available for attaching fixtures to wall boxes or panels
- Standard finishes as shown below
- Specified arm centers of 26"-62" available as single fixtures or continuous runs
- Arms allow fixture to project from a wall or ceiling nominally 4", 6", 12" or 18"
- Fixture housing rotates 332° and is locked in place with hex fastener
- Available for one T8 17W, 25W, 32W, and 40W lamp.
- Requires an instant start type ballast and enclosure (ordered separately, refer to supplemental ballast details sheet for availability)
- Fixture wired with 12', 18 ga. leads for instant start ballast operation
- Accessory lenses and tube guard available
- Limited one year warranty
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and assembled
- Made in U.S.A.

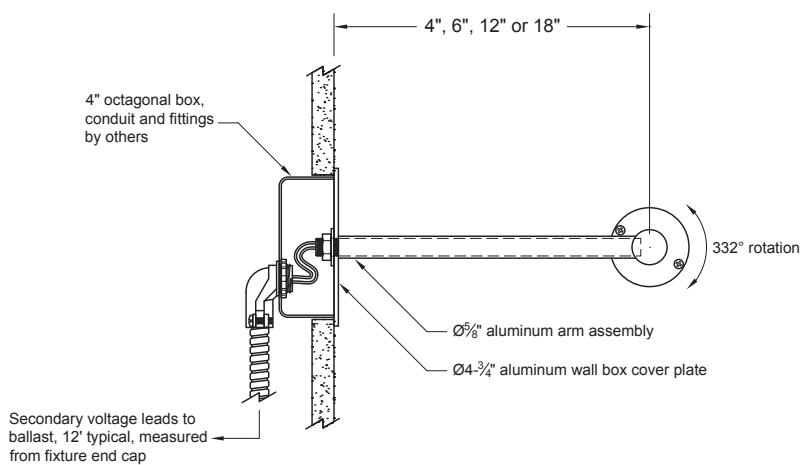
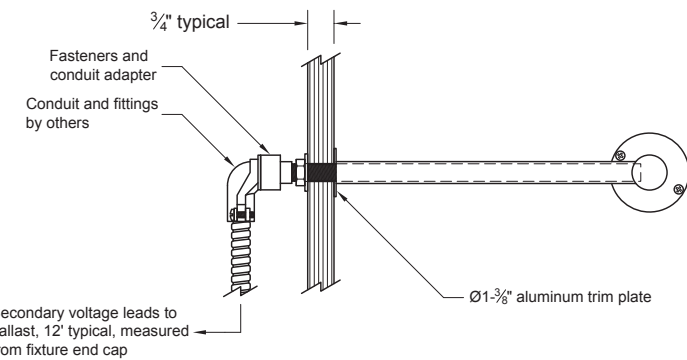


BAM900 +




+	+	+	+	+	+
LAMP	ARM CENTER DISTANCE RANGE**	NOMINAL ARM LENGTH	MOUNTING OPTION	RUN CONFIGURATION	FINISH
17: 17W T8	26" – 37-15/16"	4: 4"	WB: wall box plate	SN: single	AW: architectural white (semi-matte)
25: 25W T8	38" – 49-15/16"	6: 6"	TP: trim plate	ST: starter	WH: white (semi-gloss)
32: 32W T8	50" – 61-15/16"	12: 12"	CF: consult factory for custom mounting	AD: adder	BL: black (semi-matte)
40: 40W T8	62" ONLY"	18: 18"		TR: terminator	MB: matte black
		CF: consult factory for custom arm length			ESS: environmental satin silver
					BZ: bronze
					PR: primer
					CF: consult factory for custom finish
					SA: satin anodize (may require additional lead time)

Notes: Remote driver ordered separately, refer to supplemental driver details sheet for availability
**** NOTE: Specify arm centers within the range for a given lamp. Manufactured length tolerance is ± 1/16"**

MOUNTING

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
WB	WALL BOX MOUNTING PLATE	<ul style="list-style-type: none"> • Ø4-3/4" x 1/8" sheet aluminum plate in matching finish for mounting to 4" octagonal junction box (by others) • Includes flat head Phillips machine screws
		
TP	TRIM PLATE	<ul style="list-style-type: none"> • Ø1-3/8" x 1/8" sheet aluminum plate in matching finish for mounting to a panel with access to the back side. • Includes flat washer, hex nut and fitting for adapting from the threaded arm tube to a conduit connector (by others) • Accommodates panel thickness up to 3/4" (consult factory for special mounting conditions)
		

ACCESSORIES

	ORDERING CODE	FOR LAMP	DESCRIPTION
	LNS900F-CUT	17W, 25W, 32W, 40W	Frosted acrylic snap-in lens Length calculated by factory for minimal clearance within fixture housing
	LNS900C-CUT	17W, 25W, 32W, 40W	Linear prismatic acrylic snap-in lens Length calculated by factory for minimal clearance within fixture housing
	TGT82	17W	Clear polycarbonate tube with end caps
	TGT83	25W	
	TGT84	32W	
	TGT85	40W	