



BFL252

type:


LINEAR T8 FLUORESCENT

remote ballast two lamp T8 fluorescent fixture


- SPECIFICATIONS**
- Fully assembled housing is formed, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
 - Standard finish is high reflectance white powder coat, applied post production
 - Installed end feed connector accepts 3/8" steel flex conduit (available separately)
 - Wired with 12' leads for instant start ballast operation
 - Easy mounting through provided holes in housing
 - Available for two T8 13W, 14W, 15W, 17W, 25W, 32W or 40W linear fluorescent lamps
 - UL and ULC listed for dry and damp locations
 - Requires a remote ballast and enclosure (ordered separately)
 - IBEW manufactured and labeled
 - Made in the U.S.A.

NOTE: Lamp holders are wired for instant start ballasts. For rapid start wiring, add suffix "/RS" to catalog number.

PROFILE

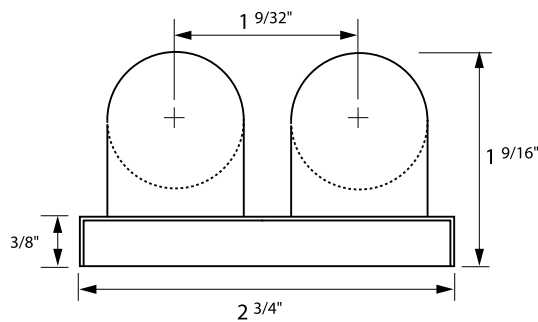

PLAN

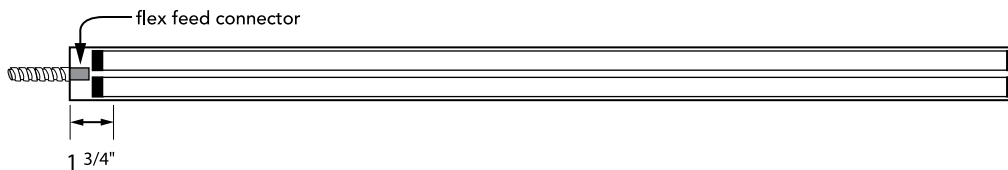

SPECIFICATION / ORDER FORMAT		DIMENSIONAL INFO.	
model no.	options	lamp	overall length
BFL252-13	/RS - rapid start wiring (for program start or dimming ballasts)	2 x 13w T8	13-1/2"
BFL252-14	/DL - damp location	2 x 14w T8	16-1/2"
BFL252-15	/CU - custom finish (consult factory)	2 x 15w T8	19-1/2"
BFL252-17		2 x 17w T8	25-1/2"
BFL252-25		2 x 25w T8	37-1/2"
BFL252-32		2 x 32w T8	49-1/2"
BFL252-40		2 x 40w T8	61-1/2"

TUBE GUARD |

TG Tube Guard (sold by the foot) ft.
NOTE: Two tubes required per fixture

REFLECTORS | 20 ga. steel construction, white powder coat finish (consult factory for optional reflector materials and finishes)

SYMMETRICAL	for fixture model
252-R1-13	BFL252-13
252-R1-14	BFL252-14
252-R1-15	BFL252-15
252-R1-17	BFL252-17
252-R1-25	BFL252-25
252-R1-32	BFL252-32
252-R1-40	BFL252-40
ASYMMETRICAL	
252-R2-13	BFL252-13
252-R2-14	BFL252-14
252-R2-15	BFL252-15
252-R2-17	BFL252-17
252-R2-25	BFL252-25
252-R2-32	BFL252-32
252-R2-40	BFL252-40
INSIDE ASYMMETRICAL	
252-R3-13	BFL252-13
252-R3-14	BFL252-14
252-R3-15	BFL252-15
252-R3-17	BFL252-17
252-R3-25	BFL252-25
252-R3-32	BFL252-32
252-R3-40	BFL252-40

T8

 architectural LIGHTING