



# BFL270-S



type:

## LINEAR T5 FLUORESCENT

remote ballast stagger T5 fluorescent fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
  - Standard finish is high reflectance white powder coat, applied post production
  - Rotational locking lamp holders
  - Installed end feed connector accepts 3/8" steel flex conduit (available separately)
  - Wired with 12' leads
  - Easy mounting through provided holes in housing
  - Available for two T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
  - Available lamp overlaps of 4" or 6"
  - UL and ULC listed for dry and damp locations
  - May be used in conjunction with BFL270 single lamp fixture to terminate runs
  - Requires a remote ballast and enclosure (ordered separately)
  - IBEW

**NOTE:** Lamp holders are wired for rapid start ballasts.

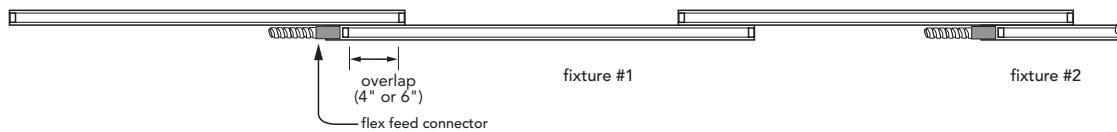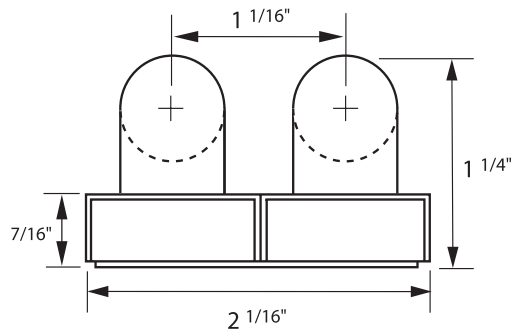

SPECIFICATION / ORDER FORMAT		DIMENSIONAL INFO.		
model no.	options	lamp	overlap	overall length
BFL270-S14/4/RS	/DL - damp location	2 x 14w T5	4"	40-1/8"
BFL270-S21/4/RS	/CU - custom finish (consult factory)	2 x 21w T5	4"	63-3/4"
BFL270-S28/4/RS		2 x 28w T5	4"	87-1/4"
BFL270-S35/4/RS		2 x 35w T5	4"	111"
BFL270-S24/4/RS		2 x 24w T5 HO	4"	40-1/8"
BFL270-S39/4/RS		2 x 39w T5 HO	4"	63-3/4"
BFL270-S54/4/RS		2 x 54w T5 HO	4"	87-1/4"
BFL270-S80/4/RS		2 x 80w T5 HO	4"	111"
BFL270-S14/6/RS		2 x 14w T5	6"	38-1/8"
BFL270-S21/6/RS		2 x 21w T5	6"	61-3/4"
BFL270-S28/6/RS		2 x 28w T5	6"	85-1/4"
BFL270-S35/6/RS		2 x 35w T5	6"	109"
BFL270-S24/6/RS		2 x 24w T5 HO	6"	38-1/8"
BFL270-S39/6/RS		2 x 39w T5 HO	6"	61-3/4"
BFL270-S54/6/RS		2 x 54w T5 HO	6"	85-1/4"
BFL270-S80/6/RS		2 x 80w T5 HO	6"	109"

**LENSES** | Two-piece system comprised of polycarbonate channel and striated snap-on cover



U5LNP  
U5LNCF

Clear fine prismatic acrylic lens with mounting clips (sold by the foot) \_\_\_ft.

Frosted acrylic lens with mounting clips (sold by the foot) \_\_\_ft.

**NOTE: Two lenses required per fixture**

**TUBE GUARD** |

TG

Tube Guard (sold by the foot) \_\_\_ft.

**NOTE: Two tubes required per fixture**

T5

architectural LIGHTING

05.2015