




## BFL206

type:

### LINEAR T5 FLUORESCENT

low profile T5 fluorescent architectural cove fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
  - Standard finish is high reflectance white powder coat, applied post production
  - Forward throw diffuse reflector
  - Adjustable sawtooth cut-off reflector
  - Knock-outs accept standard electrical fittings (by others)
  - Rotational locking lamp holders
  - Available for one T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
  - Standard universal voltage (120V - 277V) electronic high power factor ballast is pre-wired to the lamp holders
  - Dimming and emergency battery back up options available (**consult factory for availability and system compatibility**)
  - UL and ULC listed for dry and damp locations
  - IBEW manufactured and labeled
  - Made in the U.S.A.

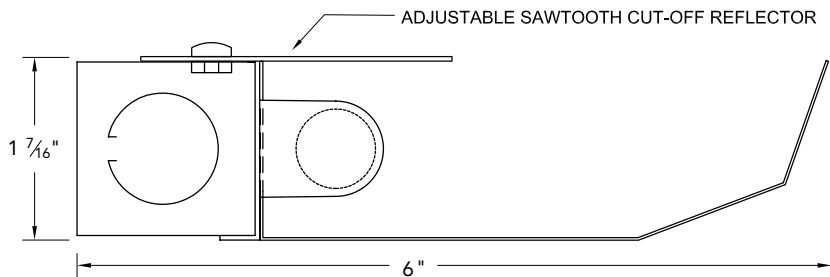

SPECIFICATION / ORDER FORMAT					DIMENSIONAL INFO.
model no.	wattage - lamp	voltage	wiring method	options	overall length
BFL206	14 - 14w T5	/UNV - 120V - 277V	/RS	Dimming - (consult factory)	22-1/2"
	21 - 21w T5			/EB - emergency ballast	34-5/16"
	28 - 28w T5			(consult factory)	46-1/16"
	35 - 35w T5			/DL - damp location	57-15/16"
	24 - 24w T5 HO			/CU - custom finish	22-1/2"
	39 - 39w T5 HO			(consult factory)	34-5/16"
	54 - 54w T5 HO				46-1/16"
	80 - 80w T5 HO				57-15/16"