


BFL207

type:

LINEAR T5 FLUORESCENT

low profile T5 fluorescent architectural cove fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
 - Standard finish is high reflectance white powder coat, applied post production
 - Forward throw diffuse reflector
 - Adjustable sawtooth cut-off reflector
 - Knock-outs accept standard electrical fittings (by others)
 - Rotational locking lamp holders
 - Available for two T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
 - Standard universal voltage (120V - 277V) electronic high power factor ballast is pre-wired to the lamp holders
 - Dimming and emergency battery back up options available (**consult factory for availability and system compatibility**)
 - UL and ULC listed for dry and damp locations
 - IBEW manufactured and labeled
 - Made in the U.S.A.

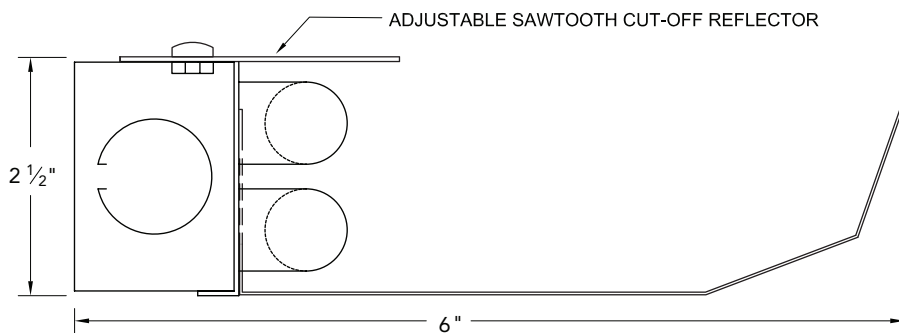

SPECIFICATION / ORDER FORMAT					DIMENSIONAL INFO.
model no.	wattage - lamp	voltage	wiring method	options	overall length
BFL207	14 - 2x14w T5	/UNV - 120V - 277V	/RS	Dimming - (consult factory)	22-1/2"
	21 - 2x21w T5			/EB - emergency ballast	34-5/16"
	28 - 2x28w T5			(consult factory)	46-1/16"
	35 - 2x35w T5			/DL - damp location	57-15/16"
	24 - 2x24w T5 HO			/CU - custom finish	22-1/2"
	39 - 2x39w T5 HO			(consult factory)	34-5/16"
	54 - 2x54w T5 HO				46-1/16"
	80 - 2x80w T5 HO				57-15/16"