

patent no. US 6,431,726 B1



BFL281-S



type:

LINEAR T5 FLUORESCENT

Flip and Slide adjustable stagger T5 fluorescent fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
 - Standard finish is high reflectance white powder coat, applied post production
 - Knock-outs accept standard electrical fittings (by others)
 - Rotational locking lamp holders
 - Available for two T5 14W, 21W, 28W, 35 and high output 24W, 39W, 54W, 80W linear fluorescent lamps
 - Adjustable lamp overlap
 - Standard Universal voltage electronic high power factor ballast is pre-wired to the lamp holders
 - Dimming option available (**consult factory for availability and system compatibility**)
 - UL and ULC listed for dry and damp locations
 - May be used in conjunction with BFL281 single lamp fixture to terminate runs
 - IBEW manufactured and labeled
 - Made in the U.S.A.

NOTE: Includes program rapid start ballast.

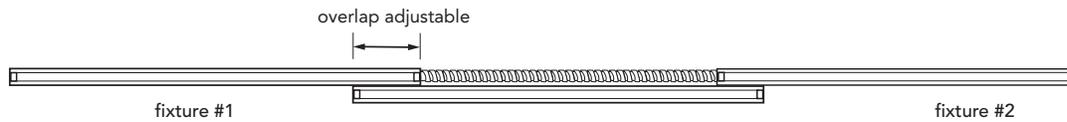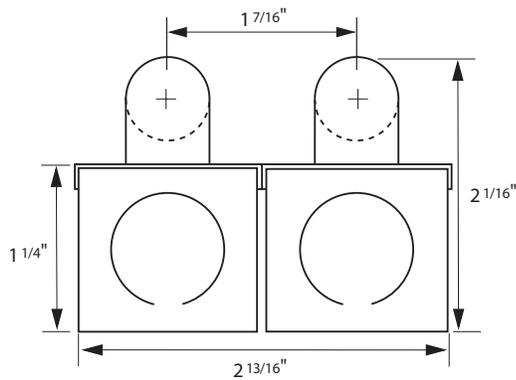

| SPECIFICATION / ORDER FORMAT | | | | DIMENSIONAL INFO. | |
|------------------------------|---------|---------------|---------------------------------------|-------------------|---------------------|
| model no. | voltage | wiring method | options | lamp | min. - max. length |
| BFL281-S-14 | /UNV | /RS | Dimming - (consult factory) | 2 x 14w T5 | *32-3/8" - 42-1/8" |
| BFL281-S-21 | | | /CU - custom finish (consult factory) | 2 x 21w T5 | 52-1/2" - 64-1/2" |
| BFL281-S-28 | | | | 2 x 28w T5 | 76" - 88" |
| BFL281-S-35 | | | | 2 x 35w T5 | 100-3/4" - 112-5/8" |
| BFL281-S-24 | | | | 2 x 24w T5 HO | *32-3/8" - 41-7/8" |
| BFL281-S-39 | | | | 2 x 39w T5 HO | 52-1/2" - 64-1/2" |
| BFL281-S-54 | | | | 2 x 54w T5 HO | 76" - 88" |
| BFL281-S-80 | | | | 2 x 80w T5 HO | 100-7/8" - 112-7/8" |

*NOTE: Some ballasts affect adjustability of this fixture length. (consult factory for overlap capability)

LENSES | Two-piece system comprised of polycarbonate channel and striated snap-on cover



U5LNP
U5LNCF

Clear fine prismatic acrylic lens with mounting clips (sold by the foot) ___ft.

Frosted acrylic lens with mounting clips (sold by the foot) ___ft.

NOTE: Two lenses required per fixture

TUBE GUARD |

TG

Tube Guard (sold by the foot) ___ft.

NOTE: Two tubes required per fixture

T5

architectural LIGHTING

08.2012