




BFL293

type:

LINEAR T5 FLUORESCENT

low profile T5 fluorescent fixture

- SPECIFICATIONS |**
- Extruded aluminum housing available in anodized polished chrome, satin aluminum and polished brass finish (consult factory for custom finishes)
 - Steel linear/wireway finished in high reflectance white powder coat
 - All fixtures made to specified length $\pm 1/16"$
 - Rotational locking lamp holders
 - Installed end feed connector accepts 3/8" steel flex conduit (consult factory)
 - Optional 1/2" D x 36" aluminum down tube feed available in matching finishes
 - Wired with 12' leads for instant start ballast operation
 - Mounting accomplished with fasteners (by others) through aluminum housing or with optional end caps, FF3 stem mount kit or clips (for glass top to front display cases)
 - Available for T5 8W, 13W, 14W, 21W, 28W, 35W and high output 24W, 39W, 54W linear fluorescent lamp in single and tandem lamp models
 - Unique location of the installed 120V or 277V electronic ballast does not obstruct light output
 - UL and ULC listed for dry and damp locations
 - IBEW manufactured and labeled
 - Made in the U.S.A.

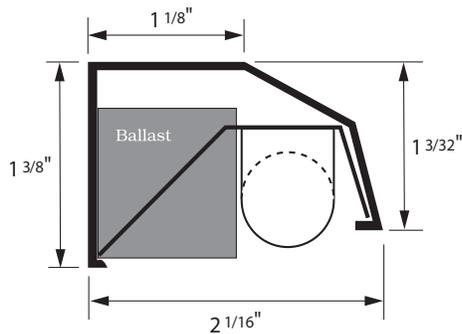

SPECIFICATION / ORDER FORMAT					DIMENSIONAL INFO.	
model no.	voltage	finish	*feed location	options	lamp	*fixture length range
BFL293-8	/120	/CH - polished chrome	/CL - customer left	/RS - rapid start	8w T5	13-1/2" - 22-1/2"
BFL293-13	/277	/SA - satin aluminum	/CR - customer right	(required for program start ballasts)	13w T5	22-9/16" - 23-3/4"
BFL293-14		/BR - polished brass	*customer point of view	/DL - damp location	14w T5	23-13/16" - 35-9/16"
BFL293-21		/CU - custom finish			21w T5	35-5/8" - 47-5/16"
BFL293-28		(consult factory)			28w T5	47-3/8" - 59-3/16"
BFL293-35					35w T5	59-1/4" +
BFL293-24					24w T5 HO	23-13/16" - 35-9/16"
BFL293-39					39w T5 HO	35-5/8" - 47-5/16"
BFL293-54					54w T5 HO	47-3/8" - 59-3/16"
						*specify to the nearest 1/16"

LENSES | Polycarbonate striated



LNS93C
LNS93O

Clear prismatic lens (sold by the foot) ___ft.
Opal prismatic lens (sold by the foot) ___ft.


TUBE GUARD |

TG Tube Guard (sold by the foot) ___ft.

DOWNTUBE FEED | See display technical section for details

FF1 Downtube feed components
FF3 Stem mount feed components


MOUNTING CLIP |



MC93

Fixture mounting clip (for glass to glass case mounting)
NOTE: Two to three required per fixture

END CAPS |



EC931

Pair solid end caps (for glass end cases)
(press fits inside BFL293 housing)