


Type:

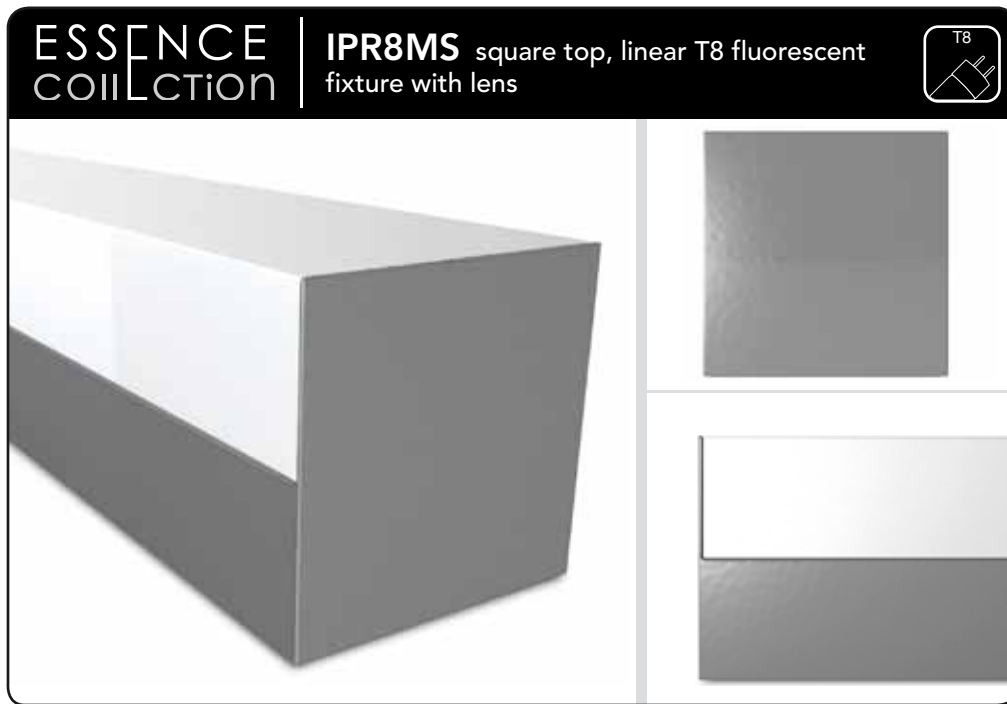

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T8 17W, 25W, 32W, and 40W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

**IPR8MS** +

Section 1	Section 2	Section 3	Section 4*	Section 5	Section 6	Section 7
1: single lamp 2: double lamp	17W: 24" 25W: 36" 32W: 48" 40W: 60" 25x25W: 72" 32x32W: 96"	U: 120V-277V 347: 347V CF: consult factory for specialize voltage	<p><b>[Non-Dimming]</b></p> <ul style="list-style-type: none"> <li>IS: instant start</li> <li>MKX: Advance Mark 10</li> <li>VII: Advance Mark 7</li> <li>ESL: Advance EssentialLine</li> <li>DALI: Dali T8</li> <li>H300: Lutron Hi-Lume 3D</li> <li>H317: Lutron Hi-Lume 3D</li> <li>TWR: Lutron Tu-Wire</li> <li>ESYS: Lutron EcoSystem</li> <li>EHD: Lutron EcoSystem H</li> <li>TEN: Universal SuperDim</li> <li>SD88-50: Universal BallaSTAR</li> <li>PSNS: Sylvania PowreSense</li> </ul> <p><b>[Custom Performance]</b></p> <ul style="list-style-type: none"> <li>IH: 1.15BF instant start</li> <li>IL: 0.77BF instant start</li> <li>IN: 0.87BF instant start</li> <li>PH: 1.15BF program start</li> <li>PN: 0.888F program start</li> <li>PXL: 0.71BF program start</li> <li>PXL60: 0.60BF prgm strt</li> </ul> <p><b>[Emergency]</b></p> <ul style="list-style-type: none"> <li>I28: Iota ISL-28</li> <li>I54: Iota ISL-54</li> <li>I540: Iota ISL-540</li> <li>L50: Bodine LP500</li> <li>LB51: Bodine B50LP-1 lamp EM</li> <li>LB52: Bodine B50LP-2 lamp EM</li> <li>L55: Bodine LP550</li> <li>L60: Bodine LP600</li> <li>L60S: Bodine LP600STU</li> <li>LB61: Bodine B60LP</li> <li>LB62: Bodine B60LP</li> <li>LBU61: Bodine BP60LPU-1 lamp EM</li> <li>LBU62: Bodine BP60LPU-2 lamp EM</li> </ul>	F: frosted P: linear prismatic	SM: surface mount CM48: cable mount 48" cable length CM96: cable mount 96" cable length PM18: pendant mount 18" stem length PM24: pendant mount 24" stem length PM30: pendant mount 30" stem length CF: consult factory for custom length	WH: white BL: black SL: silver PT: platinum BZ: bronze PR: primer CF: consult factory for custom color

\*Not all ballasts work with all lamps. Consult factory for details.

