


Type:

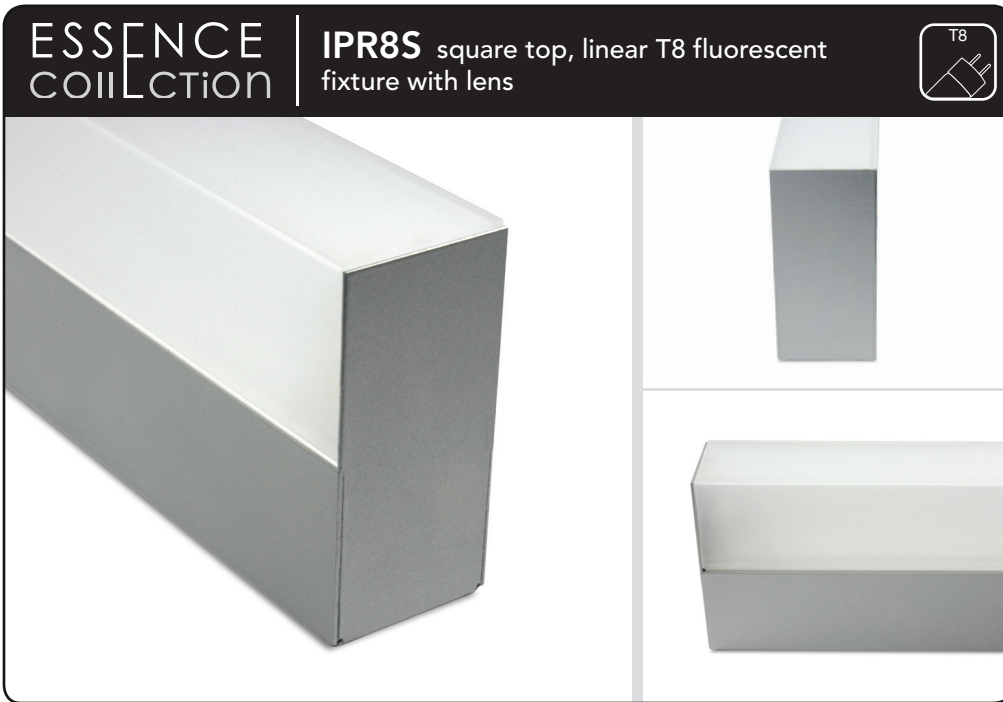

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T8 17W, 25W, 32W, and 40W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

IPR8S +

<b>Watts</b> W	<b>Voltage</b> ⚡	<b>Ballast</b> 📦	<b>Lens</b> 👁️	<b>Mount</b> 🏠	<b>Finish</b> 👕
Section 1	Section 2	Section 3*	Section 4	Section 5	Section 6
<ul style="list-style-type: none"> <li>17W: 2' nom.</li> <li>25W: 3' nom.</li> <li>32W: 4' nom.</li> <li>40W: 5' nom.</li> <li>2525W: 6' nom.</li> <li>3232W: 8' nom.</li> </ul>	<ul style="list-style-type: none"> <li>U: 120V-277V</li> <li>347: 347V</li> <li>CF: consult factory for specialized voltage</li> </ul>	<p>[Non-Dimming]</p> <ul style="list-style-type: none"> <li>IS: instant start</li> </ul> <p>[Dimming]</p> <ul style="list-style-type: none"> <li>H300: Lutron Hi-Lume 3D</li> <li>H317: Lutron Hi-Lume 3D</li> <li>ESYS: Lutron EcoSystem</li> <li>EHD: Lutron EcoSystem H</li> <li>DALI: Dali T8</li> </ul>	<p>[Emergency]</p> <ul style="list-style-type: none"> <li>I28: Iota ISL-28</li> <li>I54: Iota ISL-54</li> <li>I540: Iota ISL-540</li> <li>L50: Bodine LP500</li> <li>L55: Bodine LP550</li> <li>L60: Bodine LP600</li> <li>L60S: Bodine LP600STU</li> <li>LB51: Bodine B50LP</li> </ul>	<ul style="list-style-type: none"> <li>F: frosted</li> <li>P: linear prismatic</li> </ul>	<ul style="list-style-type: none"> <li>SM: surface mount</li> <li>CM48: cable mount 48" cable length</li> <li>CM96: cable mount 96" cable length</li> <li>PM18: pendant mount 18" stem length</li> <li>PM24: pendant mount 24" stem length</li> <li>PM30: pendant mount 30" stem length</li> <li>CF: consult factory for custom length</li> </ul>
					<ul style="list-style-type: none"> <li>WH: white</li> <li>BL: black</li> <li>SL: silver</li> <li>PT: platinum</li> <li>BZ: bronze</li> <li>PR: primer</li> <li>CF: consult factory for custom color</li> </ul>

\*Not all ballasts work with all lamps. Consult factory for details.

