




BAM917

type:

LINEAR T8 FLUORESCENT


low profile linear T8 arm mounted fluorescent 1-29/32" diameter architectural fixture for remote ballast installations

PROFILE




PLAN

SINGLE FIXTURE

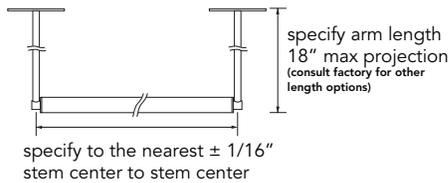

MULTIPLE FIXTURES

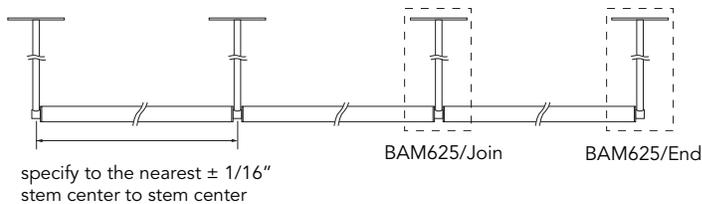

Two BAM625/End required for each fixture run

One BAM625/Join required between each fixture

- SPECIFICATIONS |**
- Arms allow remote ballast luminaires to project away from a wall or ceiling
 - Requires a remote ballast and enclosure (ordered separately)
 - Arms mount to fixture end caps and allow adjustable rotation of the housing for aiming
 - Extruded aluminum housing available in anodized polished chrome, satin, or brushed satin and white or black powder coat, applied post production
 - Steel liner/wireway finished in high reflectance white powder coat
 - Three mounting options available (dependent on type of mounting surface)
 - Kit includes one end coupler (BAM625/END) or one joiner coupler (BAM625/JOIN), 5/8" OD aluminum tube, hardware, optional mounting components as specified
 - Rotational locking lamp holders
 - Available for one T8 15W, 17W, 25W, 32W, or 40W linear fluorescent lamps
 - All fixtures made to specified length $\pm 1/16"$
 - Wired with 12' leads for instant start ballast operation
 - UL and ULC listed for dry and damp locations
 - IBEW manufactured and labeled
 - Made in the U.S.A.

SPECIFICATION / ORDER FORMAT				DIMENSIONAL INFO.
model no.	lamp	finish	options	min. - max. length
BAM917	15 - 15w T8	WH - white powdercoat	/DL - damp location	19-13/16" - 25-3/4"
	17 - 17w T8	BL - black powdercoat	Lens:	25-13/16" - 37 3/4"
	25 - 25w T8	CH - polished chrome anodize	LNS92C - clear prismatic	37-13/16" - 49-3/4"
	32 - 32w T8	SA - satin anodize	LNS92O - white prismatic	49-13/16" - 61 3/4"
	40 - 40w T8	BS - brushed satin anodize	Mounting Options:	61-13/16" -
		CU - custom finish	WB6 - round wall plate	
			ES6 - escutcheon	
			TP6 - trim plate	
			Blade Louver	

LENSES |




- LNS92C Clear prismatic lens (sold by the foot) ___ft.
- LNS92O White prismatic lens (sold by the foot) ___ft.


MOUNTING OPTIONS |



- #WB6 - Wall Box Mounting Plate**
- Heavy gauge aluminum plate mounts to 4" octagonal junction box (by others)
 - Consult factory for other plate options

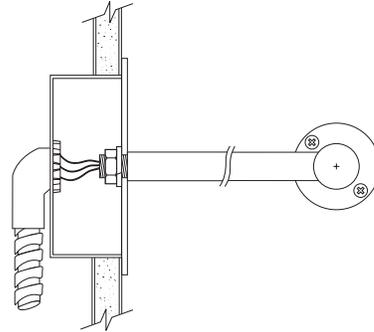

- #ES6 - Escutcheon**
- Used when mounting to a suitable panel/wall with access to the backside
 - Includes mounting sub plate and 2-1/4" OD aluminum canopy
 - Hardware included to attach standard conduit connector (by others)

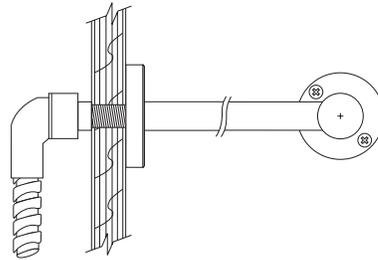

- #TP6 - Trim Plate**
- Used when mounting to a suitable panel/wall with access to the backside
 - Includes 1-3/8" OD trim plate
 - Hardware included to secure fixture and attach standard conduit connector (by others)

