




- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Standard finish is Fluoroscope White powder coat, applied post production
- Available for linear T5 fluorescent 8W, 14W, 21W, and 28W standard output or 24W, 39W, and 54W high output lamps in single fixture or continuous run configurations.
- Continuous run fixtures can be configured (**up to three fixtures maximum**) in any combination of lengths and include heavy gauge aligning/reinforcement brackets
- Single and starter fixtures include flush drywall feed box/mounting plate assembly
- Terminating fixtures include flush drywall mounting plate
- Standard ballast is specification grade 120V - 277V program start
- Dimming ballast options available (consult factory for availability and system compatibility)**
- UL and C-UL listed for dry and damp locations and through wiring
- IBEW manufactured and labeled
- Made in the U.S.A.

WATTS	LAMP POSITION	VOLTAGE	BALLAST *	CONFIGURATION	FINISH	
BZG + — 8W: 18-3/16" ** — 14W: 28-9/16" — 21W: 44-1/8" — 28W: 57-15/16" — 24W: HO - 28-9/16" — 39W: HO - 44-1/8" — 54W: HO - 57-15/16"	+ — I: Inside — O: Outside	+ — U: 120V-277V — CF: consult factory for specialize voltage	+ [Non-Dimming] — PRS: program rapid start [Dimming] — MKK: Advance Mark 10 — VII: Advance Mark 7 — H300: Lutron Hi-Lume 3D — EHD: Lutron EcoSystem H — ECO: Lutron Eco-10 — ESYS: Lutron EcoSystem — DALI: Dali T5 — PHO: Sylvania Helios — TEN: Universal Super Dim	+ [Custom Performance] — PN85: .85BF program start — PN90: .90BF program start	+ — SIN: Single — STA: Starter — ADD: Adder — TER: Terminator NOTE: Up to three fixtures maximum in any combination of lengths can be used in a run.	+ — FW: Fluoroscope White — CF: consult factory for custom color


*Not all ballasts work with all lamps. Consult factory for details.
** 8W lamp available with non-dimming, 120V ballast only.

Inside / Outside Lamp Orientations


Profile: Inside Lamp




Side / Top: Inside Lamp

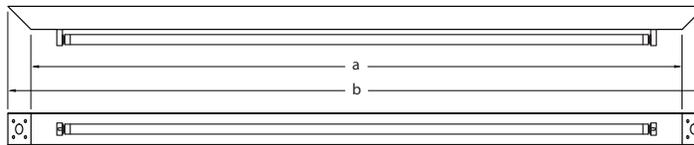

Profile: Outside Lamp



Side / Top: Outside Lamp

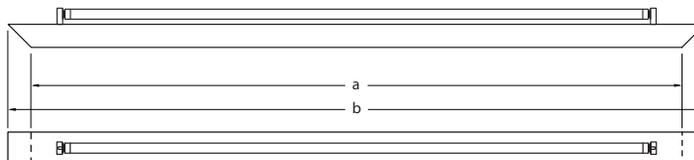

	a	b
8W	15-1/2"	18-3/16"
14W / 24W HO	25-7/8"	28-9/16"
21W / 39W HO	41-3/8"	44-1/8"
28W / 54W HO	55-1/4"	57-15/16"

FEED BOX / MOUNTING PLATE |

- Dry Wall Flush Mount (included with starter fixture)
- Knockouts accept standard electrical fittings by others
- Heavy gauge steel junction box and perforated screed

TERMINATING MOUNTING PLATE |

- Dry Wall Flush Mount (included with terminating fixture)
- Heavy gauge steel perforated screed

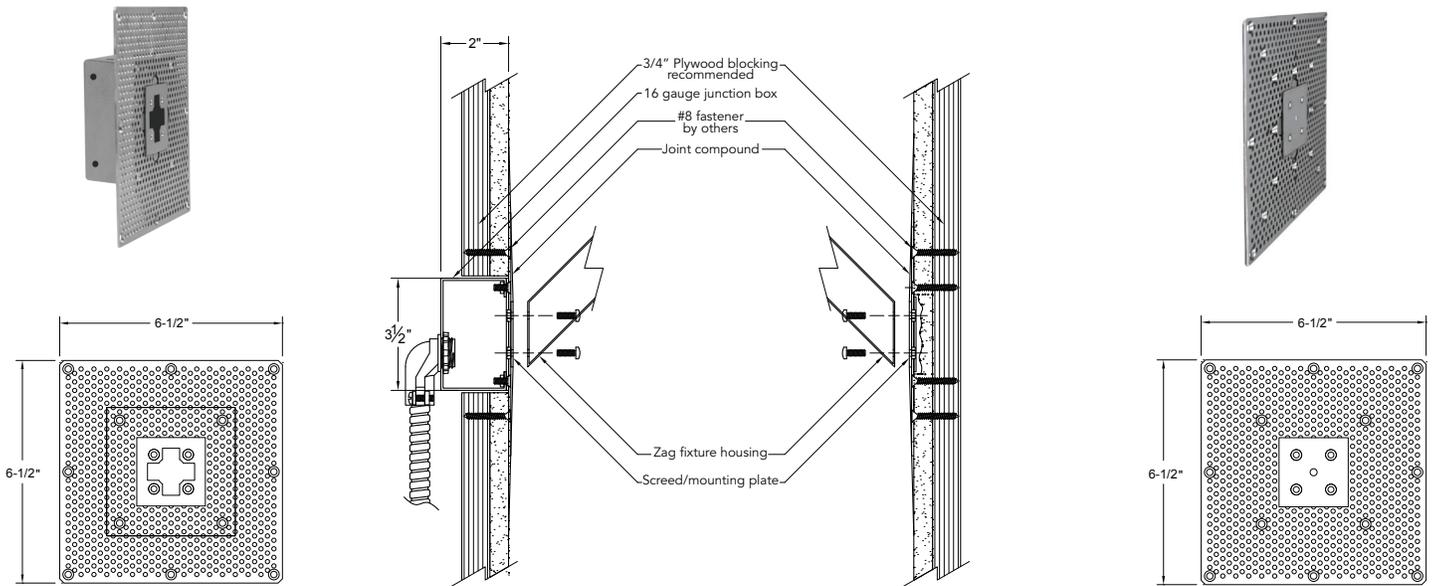


ILLUSTRATION SAMPLES |

