




BAM292i

type:

LINEAR T5 FLUORESCENT


low profile linear T5 arm mounted fluorescent 1-29/32" diameter architectural fixture for integral ballast installations

PROFILE




PLAN

SINGLE FIXTURE

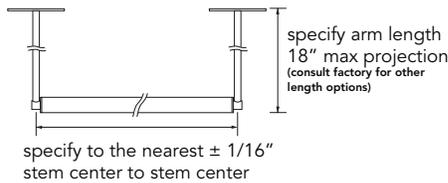

MULTIPLE FIXTURES

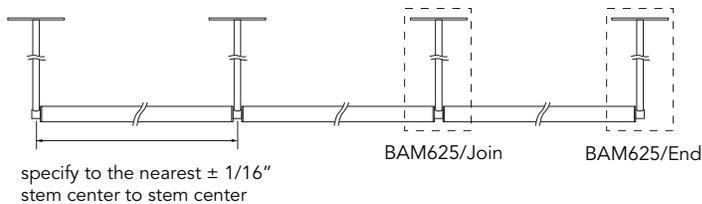

Two BAM625/End required for each fixture run

One BAM625/Join required between each fixture

- SPECIFICATIONS |**
- Arms allow integral ballast luminaires to project away from a wall or ceiling
 - Includes integral ballast
 - Arms mount to fixture end caps and allow adjustable rotation of the housing for aiming
 - Extruded aluminum housing available in anodized polished chrome, satin, or brushed satin and white or black powder coat, applied post production
 - Steel liner/wireway finished in high reflectance white powder coat
 - Three mounting options available (dependent on type of mounting surface)
 - Kit includes one end coupler (BAM625/END) or one joiner coupler (BAM625/JOIN), 5/8" OD aluminum tube, hardware, optional mounting components as specified
 - Rotational locking lamp holders
 - Available for one T5 14W, 21W, 28W, 35W or high output 24W, 39W, 54W, 80W linear fluorescent lamps
 - All fixtures made to specified length $\pm 1/16"$
 - Wired with 12' leads for instant start ballast operation
 - UL and ULC listed for dry and damp locations
 - IBEW manufactured and labeled
 - Made in the U.S.A.

SPECIFICATION / ORDER FORMAT				DIMENSIONAL INFO.
model no.	lamp	finish	options	min. - max. length
BAM292i	14 - 14w T5	WH - white powdercoat	/DL - damp location	23-15/16" – 35-11/16"
	21 - 21w T5	BL - black powdercoat	Lens:	35-3/4" – 47-7/16"
	28 - 28w T5	CH - polished chrome anodize	LNS92C - clear prismatic	47-1/2" – 59-5/16"
	35 - 35w T5	SA - satin anodize	LNS92O - white prismatic	59-3/8" –
	24 - 24w T5 HO	BS - brushed satin anodize	Mounting Options:	23-15/16" – 35-11/16"
	39 - 39w T5 HO	CU - custom finish	WB6 - round wall plate	35-3/4" – 47-7/16"
	54 - 54w T5 HO		ES6 - escutcheon	47-1/2" – 59-5/16"
	80 - 80w T5 HO		TP6 - trim plate	59-3/8" –
			Blade Louver	

LENSES |




- LNS92C Clear prismatic lens (sold by the foot) ___ft.
- LNS92O White prismatic lens (sold by the foot) ___ft.

MOUNTING OPTIONS |




#WB6 - Wall Box Mounting Plate

- Heavy gauge aluminum plate mounts to 4" octagonal junction box (by others)
- Consult factory for other plate options

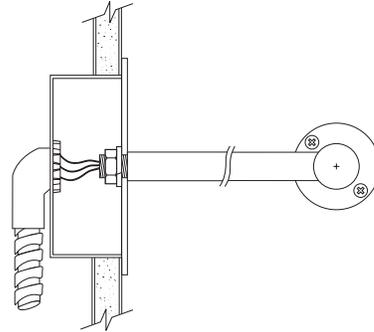

#ES6 - Escutcheon

- Used when mounting to a suitable panel/wall with access to the backside
- Includes mounting sub plate and 2-1/4" OD aluminum canopy
- Hardware included to attach standard conduit connector (by others)

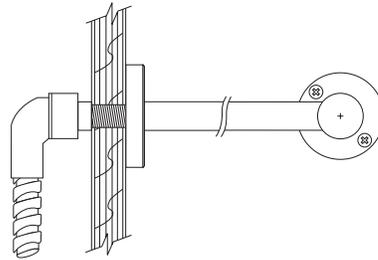

#TP6 - Trim Plate

- Used when mounting to a suitable panel/wall with access to the backside
- Includes 1-3/8" OD trim plate
- Hardware included to secure fixture and attach standard conduit connector (by others)

