



## BFLSA-JP


type:

### LINEAR T5 FLUORESCENT


linkable ultra low profile T5 fluorescent surface mounted fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
  - Standard finish is high reflectance white powder coat, applied post production
  - Rotational locking lamp holders
  - Available for T5 8W, 13W, 14W, 21W, 28W or 35W linear fluorescent lamps
  - Standard 120V electronic high power factor ballast is pre-wired to the lamp holders
  - UL and ULC listed for dry and damp locations
  - Easily mounted via through holes or clips
  - IBEW manufactured and labeled
  - Made in the U.S.A.

#### PROFILE

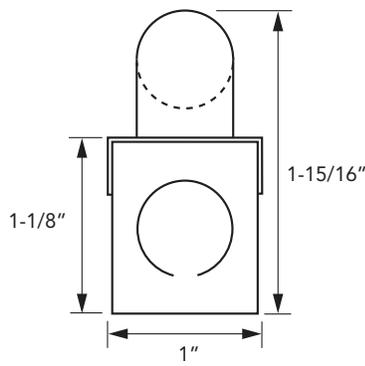

#### ISOMETRIC

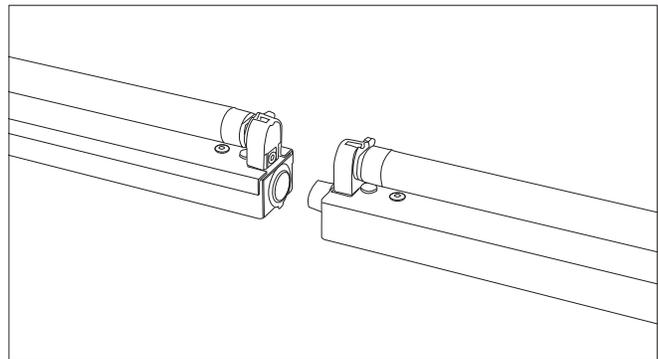

#### PLAN



SPECIFICATION / ORDER FORMAT			DIMENSIONAL INFO.	
model no.	voltage	options	lamp	overall length
BFLSA-JP-8	/120	/DL - damp location	8w T5	12-13/16"
BFLSA-JP-13		/CU - custom finish (consult factory)	13w T5	21-1/4"
BFLSA-JP-14			14w T5	22-1/2"
BFLSA-JP-21			21w T5	34-1/4"
BFLSA-JP-28			28w T5	46-1/16"
BFLSA-JP-35			35w T5	57-15/16"

**LENSES** | Two-piece system comprised of polycarbonate channel and striated snap-on cover



U5LNP	Clear fine prismatic acrylic lens with mounting clips (sold by the foot)	___ft.
U5LNCF	Frosted acrylic lens with mounting clips (sold by the foot)	___ft.

**TUBE GUARD** |

TG	Tube Guard (sold by the foot)	___ft.
----	-------------------------------	--------

**MOUNTING CLIP** | (consult factory for portable luminaire applications)

MCSA	Fixture mounting clip	
	<b>NOTE: Two to three required per fixture</b>	


**REFLECTORS** | 20 ga. steel construction, white powder coat finish (consult factory for optional reflector materials and finishes)

SYMMETRICAL	for fixture model
SA-R1-8	BFLSA-8
SA-R1-13	BFLSA-13
SA-R1-14	BFLSA-14
SA-R1-21	BFLSA-21
SA-R1-28	BFLSA-28
SA-R1-35	BFLSA-35
<b>ASYMMETRICAL</b>	
SA-R2-8	BFLSA-8
SA-R2-13	BFLSA-13
SA-R2-14	BFLSA-14
SA-R2-21	BFLSA-21
SA-R2-28	BFLSA-28
SA-R2-35	BFLSA-35
<b>INSIDE ASYMMETRICAL</b>	
SA-R3-8	BFLSA-8
SA-R3-13	BFLSA-13
SA-R3-14	BFLSA-14
SA-R3-21	BFLSA-21
SA-R3-28	BFLSA-28
SA-R3-35	BFLSA-35

**JUMPER** | Jumper available in 6", 12", 24" or 36" lengths. Custom lengths (consult factory)

JP-06	6" male to female jumper
JP-12	12" male to female jumper
JP-24	24" male to female jumper
JP-36	36" male to female jumper

**NOTE: JP Connectors connect fixtures end to end or can be used with jumper cord sets.**

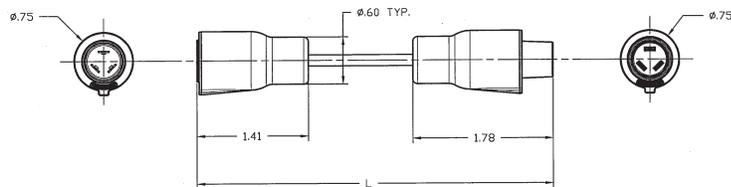

**POWER CORD** |

PCW6-P	6' male to 3 prong plug
--------	-------------------------



T5  
architectural LIGHTING

01.2014