



BFL917


type:

LINEAR T8 FLUORESCENT

remote ballast T8 fluorescent fixture

- SPECIFICATIONS |**
- Extruded aluminum housing available in anodized polished chrome, satin aluminum and polished brass finish (consult factory for custom finishes)
 - Steel linear/wireway finished in high reflectance white powder coat
 - All fixtures made to specified length $\pm 1/16"$
 - Installed end feed connector accepts $3/8"$ steel flex conduit (consult factory)
 - Optional $1/2"$ D x 36" aluminum down tube feed available in matching finishes
 - Wired with 12' leads for instant start ballast operation
 - Mounting accomplished with fasteners (by others) through housing or with optional end caps, FF3 stem mount kit or clips (for glass top to front display cases)
 - Available for T8 15W, 17W, 25W, 32W or 40W linear fluorescent lamp in single and tandem lamp models
 - UL and ULC listed for dry and damp locations
 - Requires a remote ballast and enclosure (ordered separately)
 - Integral electronic ballast option available (consult factory for availability)
 - IBEW and labeled
 - Made in the U.S.A.

NOTE: Lamp holders are wired for instant start ballasts. For rapid start wiring, add suffix "/RS" to catalog number.

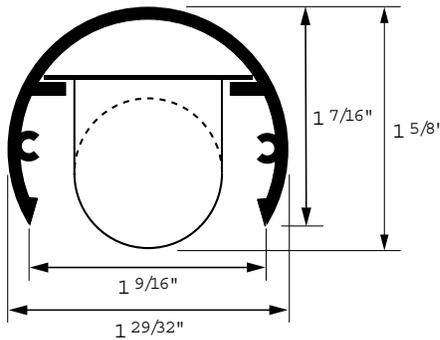

SPECIFICATION / ORDER FORMAT				DIMENSIONAL INFO.	
model no.	finish	*feed location	options	lamp	*fixture length range
BFL917-15	/CH - polished chrome	/CL - customer left	/RS - rapid start	15w T8	19-5/8" - 25-9/16"
BFL917-17	/SA - satin aluminum	/CR - customer right	(required for program start ballasts)	17w T8	25-5/8" - 37-9/16"
BFL917-25	/BR - polished brass	*customer point of view	/DL - damp location	25w T8	37-5/8" - 49-9/16"
BFL917-32	/CU - custom finish			32w T8	49-5/8" - 61-9/16"
BFL917-40	(consult factory)			40w T8	61-5/8" +
				*specify to the nearest 1/16"	

LENSES | Polycarbonate striated



LNS92C	Clear prismatic lens (sold by the foot)	___ft.
LNS92O	Clear prismatic lens (sold by the foot)	___ft.

TUBE GUARD |

TG	Tube Guard (sold by the foot)	___ft.
----	-------------------------------	--------


DOWNTUBE FEED | See display technical section for details

FF1	Downtube feed components
FF3	Stem mount feed components


MOUNTING CLIP |

MC92	Fixture mounting clip (for glass to glass case mounting) NOTE: Two to three required per fixture
------	--

END CAPS |



EC921 Pair solid end caps (for glass end cases)
(screws to BFL917 housing)



EC922 Pair end caps w/ drop mounting holes (for wood end case mounting)
(screws to BFL917 housing)

5/8" x 1 Slotted Feed Hole
3/16" Mounting Hole

display LIGHTING T8

01.2009