

2" wide rectilinear LED luminaire for outdoor locations and remote driver operation

Project: _____ Type: _____



FEATURES

The BSW208 is a linear LED luminaire for outdoor applications. The surface mount 2" wide by 3" tall extrusion is fitted with a flush, frosted lens and machined aluminum end caps. Each fixture is paired with a remote mounted wet location driver and housing.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps

Standard finishes as shown below

Available for surface mounting in nominal lengths of 2'-8" single fixtures and continuous runs

Fixtures wired with 10' low voltage leads and provided with a Ø7/8 hole for back feeding

Includes wet location 120-277V non-dimming driver and surface mount aluminum housing

Performance data pending lab tests


LEDs available in 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and C-UL listed for wet locations

SECTION

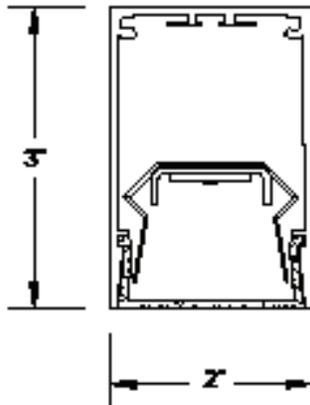

BSW208 -

NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER [remote]	LIGHT OUTPUT (lumens per foot)	MOUNT	RUN CONFIGURATION	FINISH
2: 23-3/4"	30: 3000K-80+ CRI	RN: non-dimming	L: low	SM: surface mount	SN: single	AW: architectural white (semi-matte)
3: 35-1/8"	35: 3500K-80+ CRI		R: regular	CF: consult factory for custom mounting	ST: starter	WH: white (semi-gloss)
4: 46-5/8"	40: 4000K-80+ CRI		H: high		AD: adder	BL: black (semi-matte)
5: 58"					TR: terminator	MB: matte black
6: 69-3/8"						ESS: environmental satin silver
7: 80-3/4"						BZ: bronze
8: 92-1/8"						PR: primer
						CF: consult factory for custom finish

Note: Each fixture includes a remote driver matched for fixture length and light output
 * Actual dimension dependent on run configuration

MOUNTING

	ORDERING CODE	DESCRIPTION
	SM	<p>SURFACE MOUNT</p> <ul style="list-style-type: none"> • Use appropriate fastener through Ø3/16" holes in housing • 10' low voltage leads exit out the rear at an end