

2-1/8" wide rectilinear LED fixture with drop down lens for outdoor application

Project: \_\_\_\_\_ Type: \_\_\_\_\_



### FEATURES

The BSW210 is a linear LED luminaire for outdoor lighting applications. The 2-1/8" wide extruded aluminum housing is capped by a 2" tall, rectangular or rounded profile frosted acrylic lens that produces a wide distribution of diffuse illumination. 1/4" thick machined aluminum end caps finish off the fixture ends.

### SPECIFICATIONS

Fixture constructed of an extruded aluminum, extruded, frosted acrylic lens and machined aluminum end caps

Model variations offered for surface mount applications with rectangular or rounded profiles

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Housing provided with a Ø7/8 hole for back feeding

Standard integral 120-277V non-dimming driver offered

Performance data pending lab tests

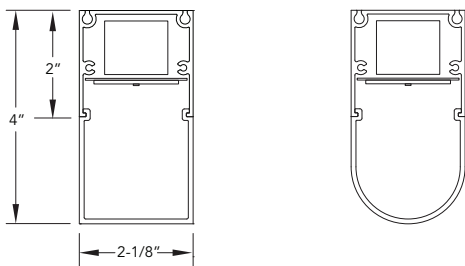
LEDs available in 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and C-UL listed for wet locations

### SECTION





## BSW210 -


NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER IN: non-dimming	LIGHT OUTPUT (lumens per foot) L: low R: regular H: high	LENS A: rectangular profile C: rounded profile	MOUNT SM: surface mount CF: consult factory for custom mounting	RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator	FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish
2: 23-3/4"	30: 3000K-80+ CRI						
3: 35-1/8"	35: 3500K-80+ CRI						
4: 46-5/8"	40: 4000K-80+ CRI						
5: 58"							
6: 69-3/8"							
7: 80-3/4"							
8: 92-1/8"							

\* Actual dimension dependent on run configuration

LENS

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	A	RECTANGULAR	Rectangular profile
	C	ROUNDED	Rounded profile

MOUNTING

	ORDERING CODE	DESCRIPTION
	SM	<p>SURFACE MOUNT</p> <ul style="list-style-type: none"> <li>• Use appropriate fastener through Ø3/16" holes in housing</li> <li>• Power entry through Ø7/8 hole on the back at an end</li> </ul>