



2-1/8" wide rectilinear LED luminaire for outdoor locations and remote driver operation

Project: _____ Type: _____

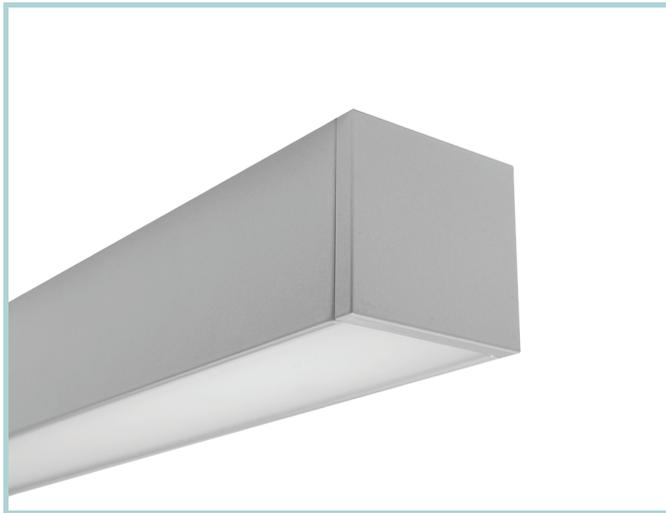

SECTION



FEATURES

The BSW225 is a linear LED luminaire for outdoor applications. The surface mount 2-1/8" wide by 2" tall extrusion is fitted with a flush, frosted lens and machined aluminum end caps. Each fixture is paired with a remote mounted, wet location driver and housing.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps

Standard finishes include architectural white (semi-matte), white (semi-gloss), black (semi-matte), matte black, environmental satin silver (alternative to anodize), bronze and primer powder coat, applied post production (consult factory for custom finishes)

Available for surface mounting in nominal lengths of 2'-8" single fixtures and continuous runs

Fixtures wired with 10' low voltage leads and provided with a Ø7/8 hole for back feeding

Includes wet location 120-277V non-dimming driver and surface mount aluminum housing

Performance data pending lab tests

LEDs available in 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and CUL listed for wet locations



BSW225 -


| NOMINAL FIXTURE LENGTH* | CORRELATED COLOR TEMPERATURE | DRIVER [remote] RN: non-dimming | LIGHT OUTPUT (lumens per foot) L: low R: regular H: high | MOUNT SM: surface mount CF: consult factory for custom mounting | RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator | FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish |
|-------------------------|------------------------------|---------------------------------------|--|---|---|---|
| 2: 23-3/4" | 30: 3000K - 80+ CRI | | | | | |
| 3: 35-1/8" | 35: 3500K - 80+ CRI | | | | | |
| 4: 46-5/8" | 40: 4000K - 80+ CRI | | | | | |
| 5: 58" | | | | | | |
| 6: 69-3/8" | | | | | | |
| 7: 80-3/4" | | | | | | |
| 8: 92-1/8" | | | | | | |

Note: Each fixture includes a remote driver matched for fixture length and light output.
* Actual dimension dependent on run configuration

MOUNTING

ORDERING CODE

DESCRIPTION



SM

SURFACE MOUNT

- Use appropriate fastener through Ø3/16" holes in housing
- 10' low voltage leads exit out the rear at an end