


2-1/8" wide rectilinear LED fixture with drop down lens for outdoor application

Project: _____ Type: _____



SECTION

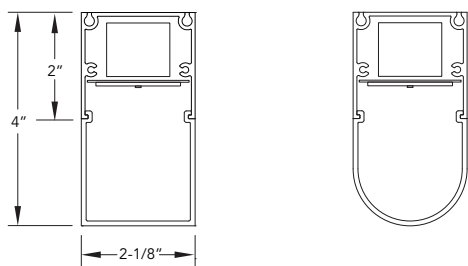

FEATURES

The BSW210 is a linear LED luminaire for outdoor lighting applications. The 2-1/8" wide extruded aluminum housing is capped by a 2" tall, rectangular or rounded profile frosted acrylic lens that produces a wide distribution of diffuse illumination. 1/4" thick machined aluminum end caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of an extruded aluminum, extruded, frosted acrylic lens and machined aluminum end caps

Model variations offered for surface mount applications with rectangular or rounded profiles

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Housing provided with a Ø7/8 hole for back feeding

Standard integral 120-277V wet location driver offered with 0-10V dimming or non-dim

Performance data pending lab tests

LEDs available in 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and C-UL listed for wet locations





BSW210 -


| | | | | | | | |
|--|--|---|--|---|--|--|--|
| NOMINAL FIXTURE LENGTH* 2: 23-3/4" 3: 35-1/8" 4: 46-5/8" 5: 58" 6: 69-3/8" 7: 80-3/4" 8: 92-1/8" | CORRELATED COLOR TEMPERATURE 30: 3000K-80+ CRI 35: 3500K-80+ CRI 40: 4000K-80+ CRI | DRIVER IN: non-dimming ID: 0-10V dimming, 5% | LIGHT OUTPUT (lumens per foot) L: low R: regular H: high | LENS A: rectangular profile C: rounded profile | MOUNT SM: surface mount CF: consult factory for custom mounting | RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator | FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish |
|--|--|---|--|---|--|--|--|

* Actual dimension dependent on run configuration

LENS

| | ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|---|---------------|-------------|---------------------|
|  | A | RECTANGULAR | Rectangular profile |
|  | C | ROUNDED | Rounded profile |

MOUNTING

| | ORDERING CODE | DESCRIPTION |
|---|---------------|--|
|  | SM | <p>SURFACE MOUNT</p> <ul style="list-style-type: none"> • Use appropriate fastener through $\varnothing 3/16"$ holes in housing • Power entry through $\varnothing 7/8$ hole on the back at an end |

EPA CALCULATIONS

| LENGTH ORDERING CODE | EPA |
|-------------------------|----------------------|
| 2 | 1.32 ft ² |
| 3 | 1.95 ft ² |
| 4 | 2.59 ft ² |
| 5 | 3.22 ft ² |
| 6 | 3.85 ft ² |
| 7 | 4.49 ft ² |
| 8 | 5.12 ft ² |