


4-1/4" square corner mount LED fixture for outdoor applications

Project: \_\_\_\_\_ Type: \_\_\_\_\_



SECTION

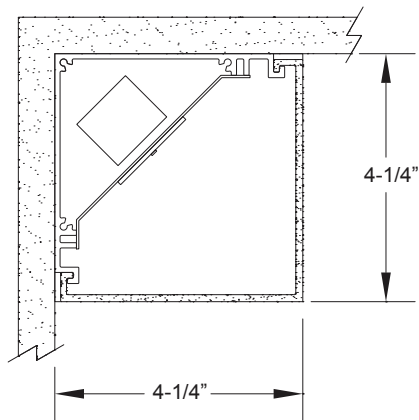

### FEATURES

The BSW755 is a corner mount, linear LED luminaire well suited for outdoor lighting. The 4-1/4" x 4-1/4" extruded aluminum housing tucks into architectural junctures and fitted with a two-sided, frosted acrylic lens. When installed, virtually no fixture housing is visible, leaving the evenly illuminated lens to make a strong visual statement.

### SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted, extruded acrylic lens and sheet aluminum end caps

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Housing provided with a Ø7/8 hole for back feeding

Standard integral 120-277V wet location driver offered with 0-10V dimming or non-dim

Performance data pending lab tests

LEDs available in 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and C-UL listed for wet locations



## BSW755 -


<p><b>NOMINAL FIXTURE LENGTH*</b></p> <p>2: 23-1/2"</p> <p>3: 34-7/8"</p> <p>4: 46-3/8"</p> <p>5: 57-3/4"</p> <p>6: 69-1/8"</p> <p>7: 80-1/2"</p> <p>8: 91-7/8"</p>	<p><b>CORRELATED COLOR TEMPERATURE</b></p> <p>30: 3000K-80+ CRI</p> <p>35: 3500K-80+ CRI</p> <p>40: 4000K-80+ CRI</p>	<p><b>DRIVER</b></p> <p>IN: non-dimming</p> <p>ID: 0-10V dimming, 5%</p>	<p><b>LIGHT OUTPUT</b></p> <p>L: low</p> <p>R: regular</p> <p>H: high</p>	<p><b>MOUNT</b></p> <p>SM: surface mount</p> <p>CF: consult factory for custom mounting</p>	<p><b>RUN CONFIGURATION</b></p> <p>SN: single</p> <p>ST: starter</p> <p>AD: adder</p> <p>TR: terminator</p>	<p><b>FINISH</b></p> <p>AW: architectural white (semi-matte)</p> <p>WH: white (semi-gloss)</p> <p>BL: black (semi-matte)</p> <p>MB: matte black</p> <p>ESS: environmental satin silver</p> <p>BZ: bronze</p> <p>PR: primer</p> <p>CF: consult factory for custom finish</p>
---	---	--	---	---	---	---

\* Actual dimension dependent on mounting option and run configuration

MOUNTING

ORDERING CODE

DESCRIPTION



SM

SURFACE MOUNT

- Use appropriate fastener through Ø3/16" holes in housing
- Power entry through Ø7/8 hole on the back at an end

EPA CALCULATIONS

LENGTH ORDERING CODE	EPA
2	1.39 ft <sup>2</sup>
3	2.06 ft <sup>2</sup>
4	2.75 ft <sup>2</sup>
5	3.41 ft <sup>2</sup>
6	4.08 ft <sup>2</sup>
7	4.75 ft <sup>2</sup>
8	5.42 ft <sup>2</sup>