


4" wide aperture linear recessed LED fixture for outdoor applications

Project: _____ Type: _____

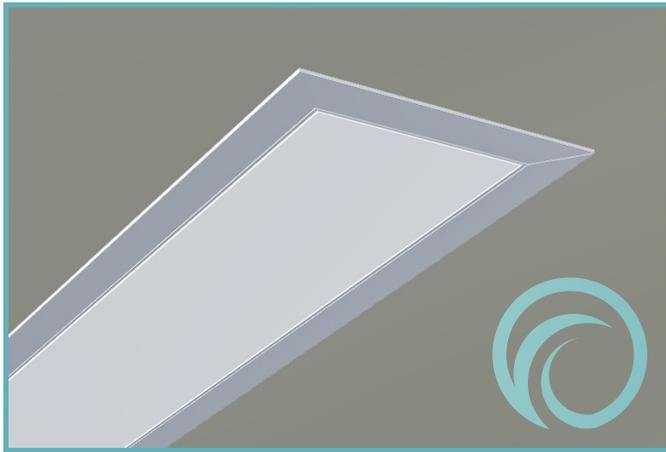

shown with flange trim and drop lens options

FEATURES

BSW440 is a recessed linear LED luminaire with 4" wide aperture for outdoor lighting applications. Single and continuous run fixtures are available for installation in exterior ceilings. Flush or 1" drop frosted acrylic lens options are offered.

SPECIFICATIONS

Fixture housing and trim elements made of extruded aluminum and 16 ga. sheet metal parts

Fixture available with flange trim for mounting in ceiling installations

Available in nominal lengths of 2'-8" single fixtures and continuous runs

Lens options include frosted acrylic flush fit, 1" drop style with lensed ends

Standard integral 120-277V wet location driver offered with 0-10V dimming or non-dim

Performance data pending lab tests

LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L₇₀


Nominal weight is 3.4 lbs. per foot

Limited five year warranty

UL listing pending

SECTIONS

FT: Flange
(drop lens option shown)



BSW440 -

MOUNTING
FT: Flange trim

NOMINAL FIXTURE LENGTH*

- 2: 24"
- 3: 36"
- 4: 48"
- 5: 60"
- 6: 72"
- 7: 84"
- 8: 96"

CORRELATED COLOR TEMPERATURE

- 27: 2700K-80+ CRI
- 30: 3000K-80+ CRI
- 35: 3500K-80+ CRI
- 40: 4000K-80+ CRI

DRIVER

- IN: non-dimming
- ID: 0-10V dimming, 5%

LIGHT OUTPUT

- L: low
- R: regular
- H: high

RUN CONFIGURATION

- SN: single
- ST: starter
- AD: adder
- TR: terminator

OPTIONS


CF: consult factory for custom flange trim finish

LENS

- F1: frosted flush
- F2: frosted drop

* Actual dimension dependent on run configuration

LENS OPTIONS

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS	
 <p>shown with flange trim option</p>	F1	FROSTED FLUSH LENS	4" W frosted acrylic extrusion	
 <p>shown with flange trim option</p>	F2	FROSTED DROP LENS	4" W x 1" H frosted acrylic extrusion with matching acrylic end caps	